
## **Product Specifications (RCCB)** Cable inlet Suitable for any automat busbar input When completely open, constituting a 25mm<sup>2</sup> cross-section, preventing cables to slid through, special design electric terminal slots Fitting screw Multiple riveting system (Suitable for any type of screwdriver) Body suitable for rail assembly Label and label glass -Monthly test button Body resistant to high temperature Technical specifications Cocking lever Product code International standards Perfect isolation and dielectric property [2] Breakable part for busbar connection Continuous Traceability Wiring diagram Red and Green ON/OFF Indicator (Applies to 3 kA RCCBs)

The lowest working temperature

## Dismantled Product (RCCB)

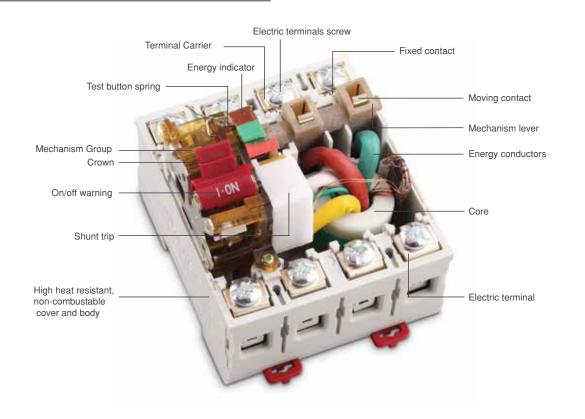

Dual-stage rail lock