


Technical Details



You do not need to screw or unscrew through thanks to design.



Possibility to connect earthing conductor to switches.

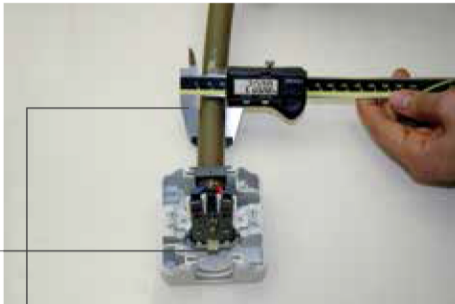


Conduits permit as Ø20 mm diameter.
Mechanisms can fit own place tight.



Bridge circuits are ready.
Wide space for connection conductors.

Possibility to pass the cord below the mechanism

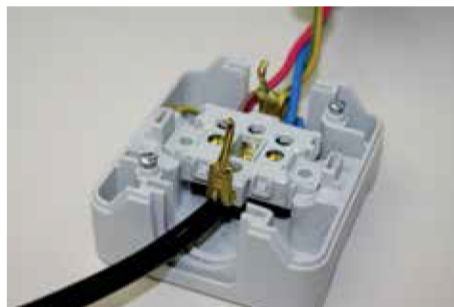

There are two options with or without screw terminals (quick connection)



With screw terminals



Without screw terminals and Socket Outlets

Materials of switches and socket outlets



1. Switch Button	ABS
2. Switch Cover	PP (polypropylene)
3. Conduit Plug	PVC
4. Mechanism	PA6 (polyamide 6) / PC (polycarbonate)
5. Box	PP (polypropylene)



1. Lid	ABS
2. Socket Cover	PP (polypropylene)
3. Conduit Plug	PVC
4. Mechanism	PA6 (polyamide 6) / PC (polycarbonate)
5. Box	PP (polypropylene)

Differences between IP44 and IP55



IP44

- Protected against splash water from any direction
- Protected against solid objects over 1.0 mm e.g. wires

IP55

- Protected against pressurized water from all angles.
- Protection against dust ingress